

S11 PLATFORM LIFT

LIFE WITHOUT BARRIERS



S11 SPECIFICATIONS

| | |
|------------|--|
| Capacity | 400kg |
| Speed | 0.05m/sec |
| Travel | 2000mm maximum |
| Pit | Not Required |
| Size | 1120W x1400Dmm NCC E3 Size |
| Power | 240V Single Phase |
| Compliance | AS1735.14 (up to 1000mm) AS1735.15 (up to 2000mm) |

 **easy living**[™]
platform lifts
access for all...[™]

QUALITY

COMPLIANCE

VALUE

S11 PLATFORM LIFT

ORDER FORM

APPLICATION

- Indoor
 Outdoor

MACHINE SIDE

- Right
 Left

PLATFORM SIZE

- 1120W x 1400D mm (NCC E3 Size)

CONFIGURATION

- Through car BCA COMPLIANT
 Adjacent (90 degree exit) requires exception

GATE HINGING (as viewed from lowest level)

UPPER

- Right Hand Hinge
 Left Hand Hinge

LOWER

- Right Hand Hinge
 Left Hand Hinge

PLATFORM FINISH

- RAL 7040 (Std) Window Grey
 Platform walls in clear polycarbonate infill with RAL 7040 Frame
 Chequer Plate Flooring
 Operating panel on machine side

SAFETY

ONBOARD PROTECTION

- Manual onboard gates top and bottom landings
 Hold-to-Run controls
 Emergency Stop
 Automatic overspeed sensing
 Anti-crushing edge guard
 Infra red sensors on landing side

UPPER GATE & LANDING PROTECTION


- Automatic gate in clear polycarbonate.
 Where the travel exceeds 600mm, the upper level shall be provided with self closing gate (AS1735.14)

PROTECTION UNDERNEATH PLATFORM

- Safety edge-under platform proximity sensors

OPTIONAL EXTRAS

- Post mounted call station positioned _____ metres from unit (no conduit required)

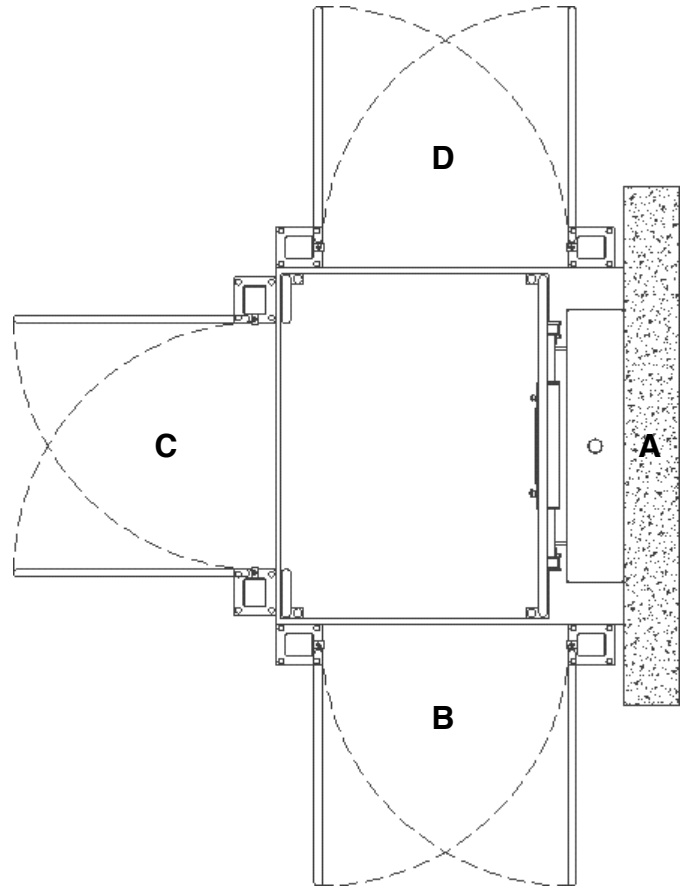


Please Circle

GROUND FLOOR ENTRY B C D
 Foldable access ramp

Please Circle

UPPER FLOOR EXIT B C D

TRAVEL HEIGHT _____ mm

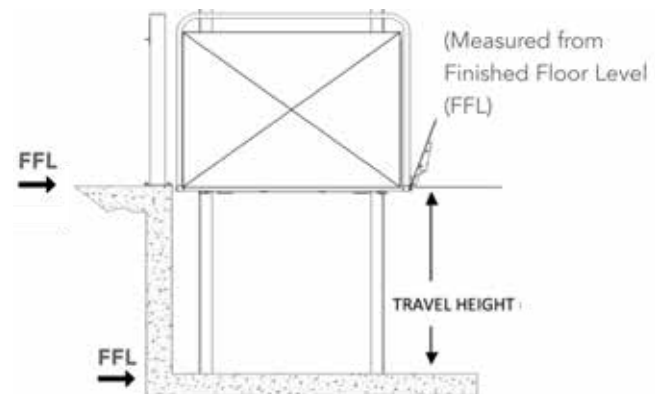

NSW & ACT: 02 8116 1550
 WA & SA: 08 6272 9450
 sales@easy-living.com.au

VIC & TAS: 03 9094 8650
 QLD & NT: 07 3851 7550
 www.easylivingplatformlifts.com.au