

EL200 PLATFORM LIFT

LIFE WITHOUT BARRIERS



Free standing design
No pit requirement
Indoor and outdoor use
Single phase power



SPECIFICATIONS

COMPLIANCE	AS1735.14/15 & NCC E3.6
CAPACITY	400kg
SPEED	0.15m/sec
MAX. TRAVEL	2000mm
PIT	NO pit required
HEADROOM	2000mm measured from the top level
PLATFORM SIZE	1100W x 1400D mm
FOOTPRINT	1300W x 1760D mm
POWER	Single phase
DRIVE SYSTEM	Belt
MANUFACTURED	Europe

 **easy living**TM
platform lifts
access for all...

QUALITY

COMPLIANCE

VALUE

EL200 PLATFORM LIFT

ORDER FORM

APPLICATION

- Indoor
- Outdoor

PLATFORM SIZE

- 1100W x 1400D mm (**NCC E3 Size**)

CONFIGURATION

- Through car (**NCC compliant**)

LOWER GATE as viewed from landing

- 950W x 1100H mm self-closing in clear glass
- Right hand hinge
- Left hand hinge

UPPER GATE as viewed from landing

- 950W x 1100H mm self-closing in clear glass
- Right hand hinge
- Left hand hinge

CONTROLS

- Braille push buttons
- Illuminated controls
- Self closing gate in clear glass
- Post mounted call station positioned _____ meters from unit (no conduit required)

SAFETY


- Safety edge-under platform proximity sensors
- Integrated handrail on both sides of platform lift
- Manual emergency lowering
- Auto dialing hands free phone with GSM button
- 1100mm cabin height

PLATFORM FINISH

- Frame in RAL 9006 white aluminium
- Clear glass walls and gates
- Rubber flooring
- Anticorrosive coating

OPTIONAL EXTRAS

- Automatic opening gate

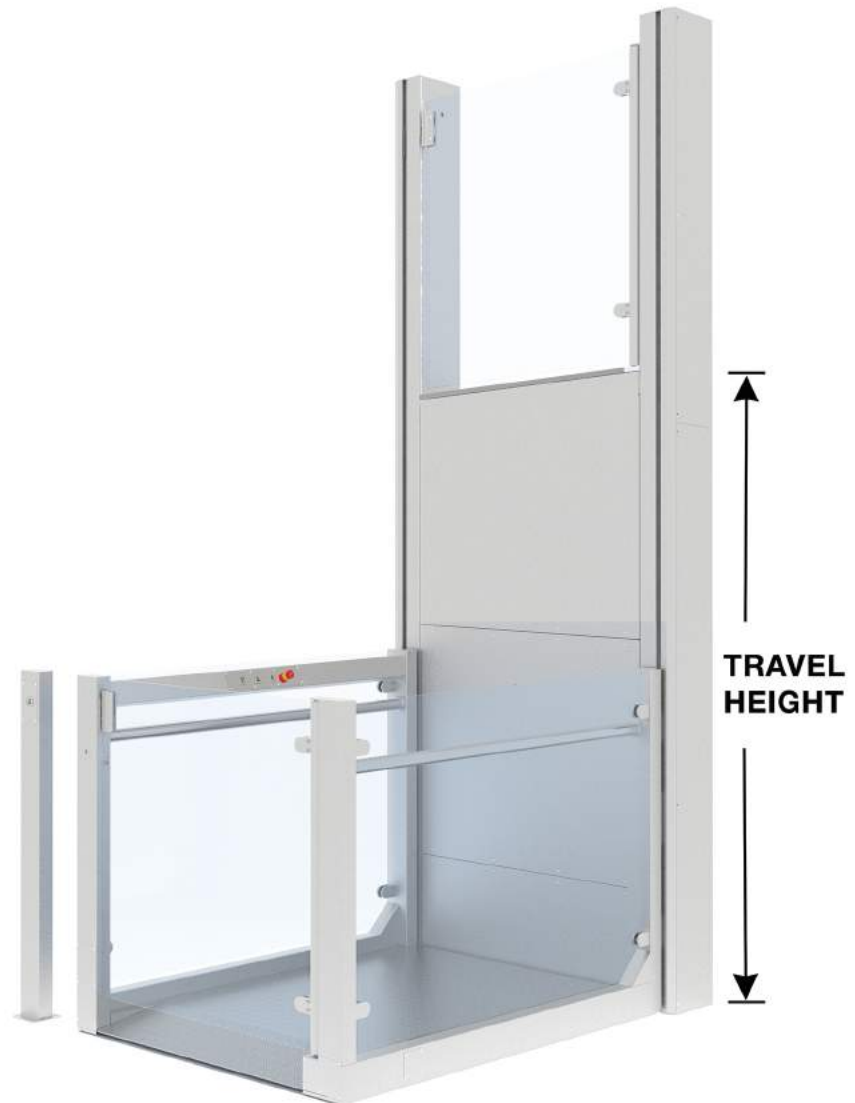

NSW: 02 8116 1550

VIC & TAS: 03 9094 8650

WA & SA: 08 9322 4650

QLD & NT: 07 3851 7550

www.easylivingplatformlifts.com.au sales@easy-living.com.au